70*100MM

front

User Manual


Model: PD-060B

XTRA POWER

65W

USB-C Charger USB Smart Quick Charge 3.0

GaN Fast Charger

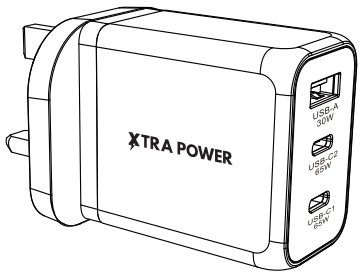

65W GaN Power Adapter

1. Product Overview

1-1Introduction

1-2Accessories

2. Appearance Description

2-1 Technical Parameters

2-2 Protection

2-3 Material

2-4 Appearance and Interface

3. Operation Instructions

Thank you for choosing our products.
Please read carefully our User Manual before using it, if you have any problem when using, please contact our customer service, we'll solve it as soon as possible.
And any suggestion warm welcomed.

1.Product Overview

1-1 Introduction

◆65W GaN 3 Ports Wall Charger
◆USB-C1 Output: 3.3V-11V/3A or 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/3.25A(65W Max)
◆ USB-C2 Output: 3.3V-11V/3A or 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/3.25A(65W Max)
◆ USB-A Output: 4.5V/5A or 5V/4.5A or 9V/3A or 12V/2.5A or 20V/1.5A(30W Max)
◆ USB-C1+USB-C2 Output: 45W+18W(63W Max)
◆ USB-C1+USB-A Output: 45W+18W(63W Max)
(USB-A/C2 Output: 5V/3A or 9V/2A or 12V/1.5A)
◆ USB-C2+USB-A Output: 5V/3A(15W Max)
◆ USB-C1+USB-C2+USB-A Output: 45W+5V/3A(60W Max)
◆ Total Output: 65W Max
◆ Elegant, durable, heat eliminable.
◆ Over-load, Over-voltage, over-current and short circuit protection.
◆ Compact and unique appearance design by our own, without any gap.
◆ Guaranteed Safety: Premium materials and built-in fail-safes keep you and your device protected against shorts.

Back

1-2 Accessories
◆ 65W GaN PowerAdapter 1EA
◆ Color box 1EA
◆ User Manual 1EA


2. Appearance Description

2-1 Technical Parameters


◆ Input Voltage: AC 100-240V~ 50/60Hz, 1.5A
◆USB-C1 Output: 3.3V-11V/3A or 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/3.25A(65W Max)
◆ USB-C2 Output: 3.3V-11V/3A or 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/3.25A(65W Max)
◆ USB-A Output: 4.5V/5A or 5V/4.5A or 9V/3A or 12V/2.5A or 20V/1.5A(30W Max)
◆ USB-C1+USB-C2 Output: 45W+18W(63W Max)
◆ USB-C1+USB-A Output: 45W+18W(63W Max)
(USB-A/C2 Output: 5V/3A or 9V/2A or 12V/1.5A)
◆ USB-C2+USB-A Output: 5V/3A(15W Max)
◆ USB-C1+USB-C2+USB-A Output: 45W+5V/3A(60W Max)
◆ Total Output: 65W Max

2-2 Protection
◆ Output Short Circuit Protect: on short circuit protection situation, our
item will stop charging to protect devices
◆ Over Voltage Protection:
protection system will be started

2-3 Material
Plastic Housing: PC+ABS+Fireproof material
2-4 Appearance and Interface

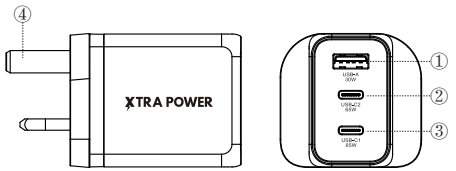

① USB-C1 Output: 3.3V-11V/3A or 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/3.25A(65W Max)
② USB-C2 Output: 3.3V-11V/3A or 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/3.25A(65W Max)
③ USB-A Output: 4.5V/5A or 5V/4.5A or 9V/3A or 12V/2.5A or 20V/1.5A(30W Max)
④ Connect to alternating current.

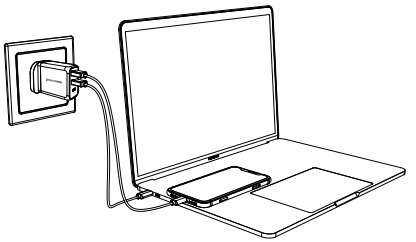

3. Operation Instruction

◆As above picture showed, connect to alternating current AC 100-240V ,
then 65W 3 Ports GaN Charger will work.

⚠ Our item is suitable to use in AC 100-240V Constant Alternating Current,
if higher or lower voltage is unsuitable

CE FC RoHS